HSF Pb RoHS

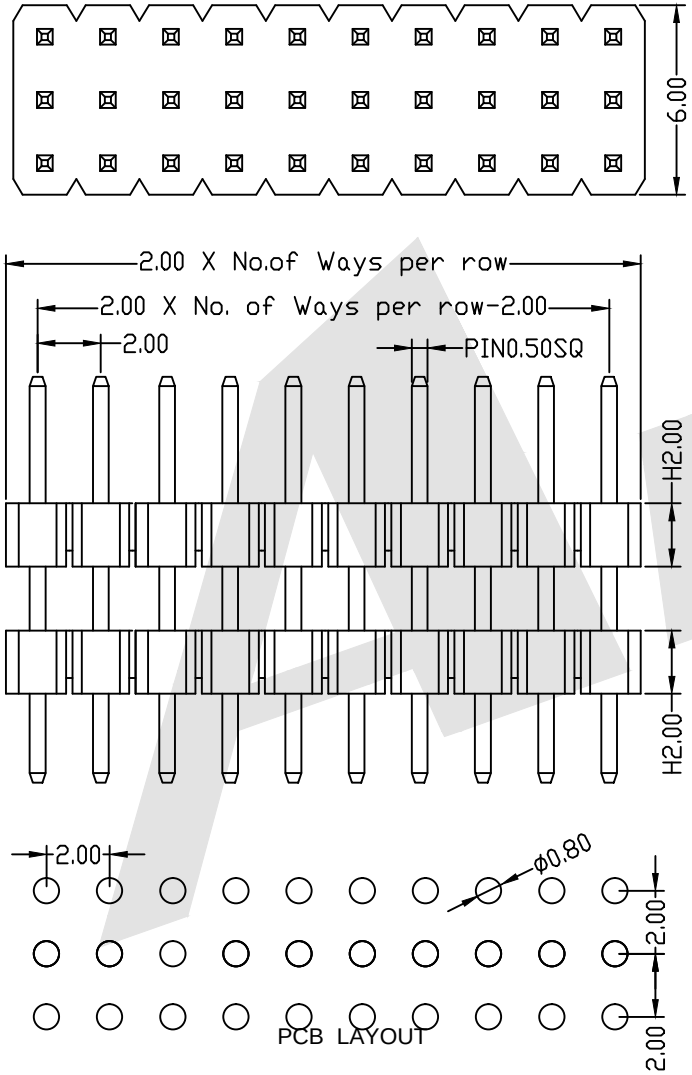

SPECIFICATION

Current Rating:	1.5 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0
	Standard:PBT UL94V-0 Black

Ordering Code:

PHDS09 - X - X - T - A - C - B - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No.of Contacts
03 To 120

③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
T:Three

⑤ Pin Length:
A:0400=4.0mm
C:0600=6.0mm
B:0280=2.8mm
Please mark the desired length in the A/C/B

⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Standard IE P/N : PHDS09-10-G0-T-0400-0600-0280-B-B

A	C	B
4.00	6.00	2.80
Optional		

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown | UNIT: mm
DRAW YG ZHONG | DATE 01/05/2016
CHECK BobYang | DATE 01/05/2016

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.00mm Pin Header Three RowDouble
Plastic Straight Type

DRAWING NO: PHDS09-XXT-0400-0600-0280-XX
PRODUCT NO: PHDS09-XXT-0400-0600-0280-XX

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25

Antenk